


21MM-SMS28

Satellite Multiswitch 2 In 8 Out Instructions


Features and Benefits

- » Pay TV approved
- » View any horizontal or vertical polarity Satellite from any outlet in your TV system
- » High output with 3dB Gain
- » High isolation port to port
- » Wide band frequency to 2400MHz
- » Ideal for Satellite Pay TV and Vast distribution
- » Connects up to 8 Satellite receivers or 4 IQ receivers

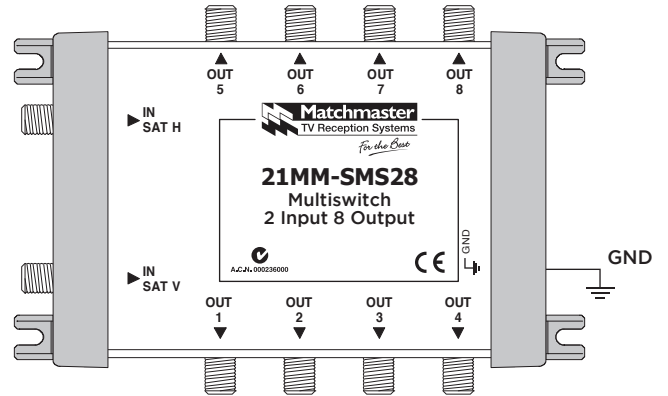

4 Foxtel IQ Receiver Setup

Allows you to distribute Satellite signals to any outlet in your TV system

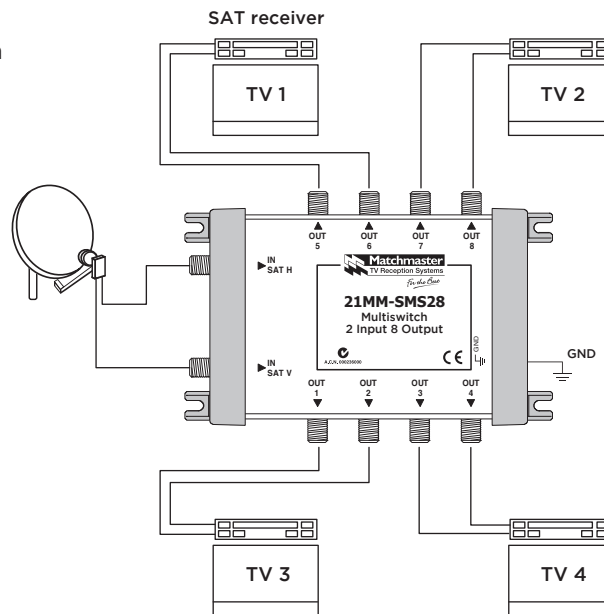

Radial Multiswitch Specifications

Foxtel Approval Number	F30928	
Frequency Range	Satellite	950-2400 MHz
Inputs	2 x Satellite	F Type Female
Outputs	8	F Type Female
Insertion Gain	3dB ± 2dB	
Isolation	Switching	30dB
	Input	40dB
	Output	30dB
Return Loss	950-2300 MHz	12dB
	2300-2400 MHz	10.5dB
Max O/P Level	88dBµV	IMA 35dB @ EN50083-3
	100dBµV	IMA 35dB @ EN50083-3
Switching Control	Horizontal	16.0 - 19.0 Vdc
	Vertical	11.5 - 14.0 Vdc
Power	Receiver	60mA Max
Dimension in MM	152 (L) x 118 (W) x 42 (H)	
Weight	290g	