

Satellite Multiswitch 2 In 8 Out


21MM-SMS28



For the Best

Features and Benefits

- » Foxtel approved (F30928)
- » View any horizontal or vertical polarity satellite from any outlet in your TV system
- » High output with 3dB Gain
- » High isolation port to port
- » Wide band frequency to 2400MHz
- » Ideal for Satellite Pay TV and Vast distribution.
Connects up to 8 Satellite receivers or 4 IQ receivers

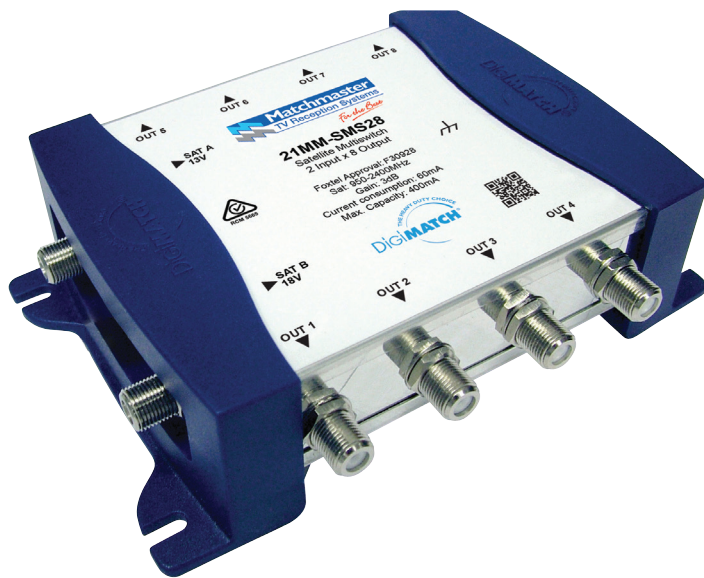

21MM-SMS28 Specifications

Foxtel Approval Number	F30928	
Frequency Range	Satellite	950-2400 MHz
Inputs	2 x Satellite	F Type Female
Outputs	8	F Type Female
Insertion Gain	3dB ± 2dB	
Isolation	Switching	30dB
	Input	40dB
	Output	30dB
Return Loss	950-2300 MHz	12dB
	2300-2400 MHz	10.5dB
Max O/P Level	88dBµV	IMA 35dB @ EN50083-3
	100dBµV	IMA 35dB @ EN50083-3
Switching Control	Horizontal	16.0 - 19.0 Vdc
	Vertical	11.5 - 14.0 Vdc
Power	Receiver	60mA Max
Dimension	152x100x42mm (WxHxD)	
Weight	290g	