


4 Way 20dB High Isolation Tap for MATV, TDT and SAT 17MM-DM34Q-20

Features and Benefits

- » Pay TV approved F30964
- » Return Loss ≥ 10 dB
- » Tap Loss 20dB
- » Frequency range 5-2400MHz
- » Power pass input to output
- » Can be mounted vertical or horizontal for ease of installation

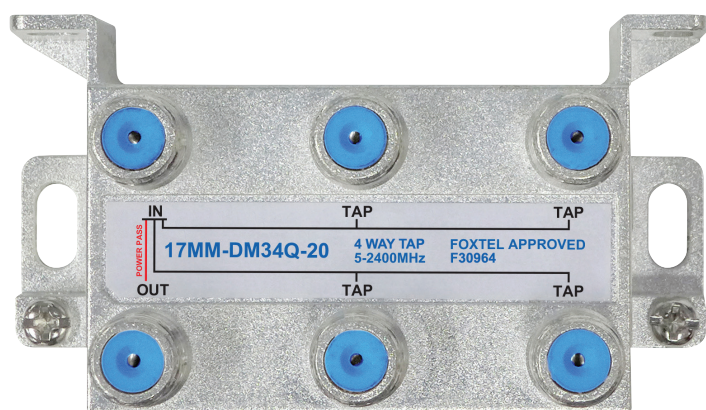

Splitters and Taps

Matchmaster has a premium range of RF Splitters & Taps ranging from 1 Way through to 8 Way. We cater for both Terrestrial and Satellite frequencies with both Single Port AC/DC and All Port DC Power Pass products available.



17MM-DM34Q-20 Specifications

	Frequency (MHz)	Typical Value (dB)
Insertion Loss (dB) IN-OUT	5-40	≤ 3.0
	40-692	≤ 3.0
	692-1000	≤ 3.5
	1000-1500	≤ 4.5
	1500-1860	≤ 5.0
Tap Loss (dB) IN-TAP	1860-2400	≤ 6.0
	5-40	20 ± 2.0
	40-692	20 ± 2.0
	692-1000	20 ± 2.0
	1000-1500	20 ± 2.0
Reverse Isolation (dB) OUT-TAP	1500-1860	20 ± 2.5
	1860-2400	20.5 ± 2.5
	5-40	≥ 25
	40-692	≥ 30
	692-1000	≥ 28
Mutual Isolation (dB) TAP-TAP	1000-1500	≥ 25
	1500-1860	≥ 25
	1860-2400	≥ 25
	5-40	≥ 25
	40-692	≥ 30
Return Loss (dB) IN/OUT/TAP	692-1000	≥ 30
	1000-1500	≥ 25
	1500-1860	≥ 25
	1860-2400	≥ 25
	5-40	≥ 10
	40-692	≥ 10
	692-1000	≥ 10
	1000-1500	≥ 10
	1500-1860	≥ 10
	1860-2400	≥ 10