




TWO INPUT MATV AMPLIFIER

14MM-TA242

- ZINC DIECAST HOUSING W/WHITE PAINTING
- POWER SOURCE: 240V/50Hz~
- TV GAIN ADJUSTMENT RANGE:0-20dB
- DISTRIBUTE VHF TO BIII AND BI+FM W/SEPARATE GAIN ADJUSTMENT
- U+V OR UHF BAND SWITCHABLE
- SCREENING: 45-470MHz \geq 75dB, 470-862MHz \geq 65dB
- EXTERNAL OUTPUT POWER 14V DC 70mA FROM POWER SUPPLY ITSELF (OPTION)
- IMPEDANCE: 75 Ω
- FREQUENCY:45-862MHZ.

BAND	VHF		U+V / UHF SWITCHABLE	
	BIII	BI+FM	U+V	UHF
FREQUENCY	174-230MHz	45-144MHz	45-862MHZ	470-862MHZ
BAND GAIN	35dB	35dB	45dB	45dB
DSR (OUTPUT LEVEL)	110dBuV		108dBuV	
FLATNESS RESPONSE	± 1.5 dB			
NOISE FIGURE	< 7dB		< 8dB	
OUTPUT VOLTAGE	DC 14V/70mA			

OUTPUT SOCKET
DC 14V 70mA

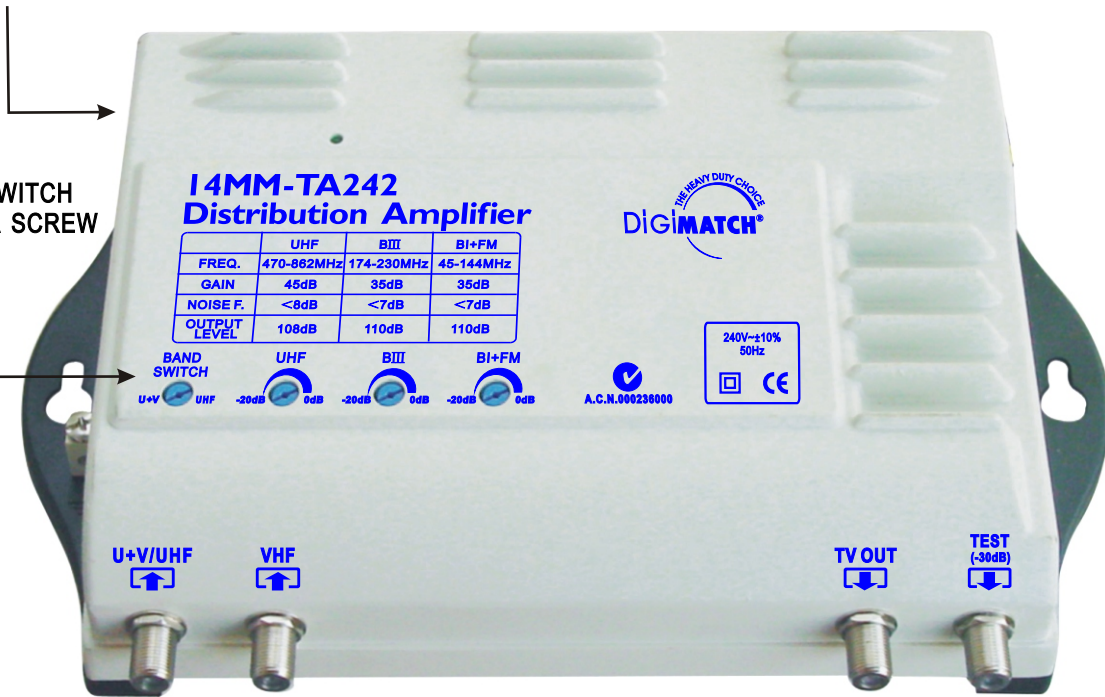

GAIN AND BAND SWITCH
ADJUSTMENT BY A SCREW
DRIVER

 A.C.N.000236000



For more information or technical assistance call Matchmaster Head office on 61(2) 9153 6666 or call our Toll Free Numbers, Australia:1800 AERIAL, New Zealand: 0800 AERIAL.